



# Samsung SMART Signage

## QET series

Upgrade your business with efficient digital displays

Samsung's QET series features intelligent upscaling technology to ensure all content displayed is in eye-catching UHD resolution. Its powerful Crystal Display and boundless design provide an enthralling viewing experience in any business environment. QET displays are economical and efficient, integrating with Samsung's MagicINFO Lite to provide users with a simple content management solution.


### Highlights

- Engage customers with lifelike images through ultra-high definition resolution
- Deliver UHD-level picture quality even with lower resolution content through Crystal Processor 4K supporting innovative UHD upscaling
- Crystal Display allows viewers to enjoy a wider spectrum of colors
- Boundless design blends into any environment allowing viewers to focus on content, not hardware
- Easily manage display content with MagicINFO Lite solution included
- Efficient and economical display providing ultimate value


# Consumers demand bigger screens, better picture quality

As visual display technology continues to advance, consumers have raised expectations around the quality of the content they see. It's never been more important for businesses to provide excellent picture quality, no matter the communication channel. To create a more impactful and distinct customer experience for today's consumers, many businesses are looking to deliver content on a grander scale, pushing demand for displays larger than 65-inches higher than it's ever been.

## Ultra-high definition is the new normal \*

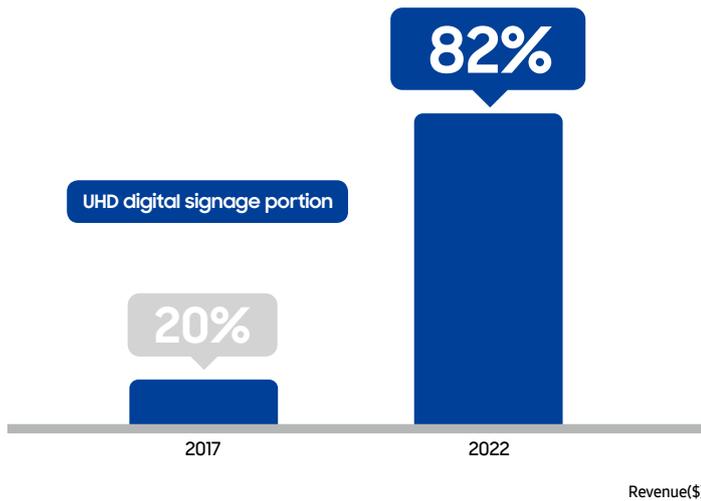

## Demand for bigger screens is on the rise \*\*

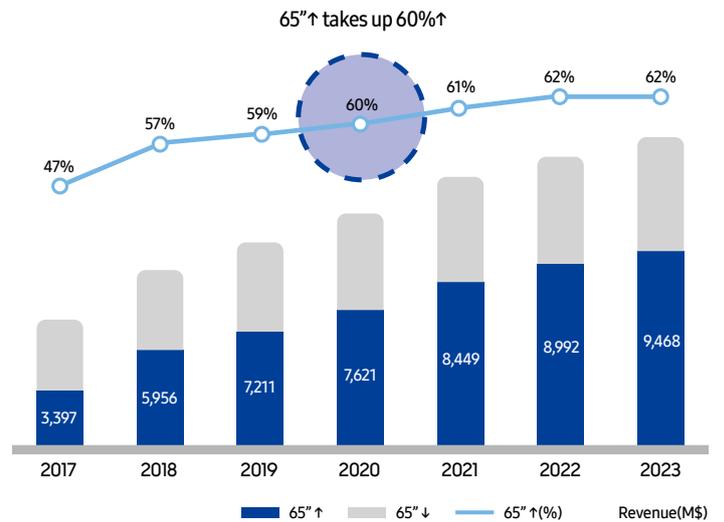

\*,\*\* Source : Omdia, Public Displays Market Tracker Q4 2019, January 2020. Revenues in USD Millions. Does Not Include Consumer TVs Used as Public Displays. Not an Endorsement of Samsung Electronics Co. Ltd. Any Reliance on these results is at the third-party's own risk.

## New QET series meets today's demand

Samsung's superior visual display technology has positioned them as the industry leader in digital signage for a decade\*. Samsung has also been the global leader in TV sales for 14 consecutive years according to IHS Markit\*\*. Samsung's new QET series is a result of Samsung's advanced technology expertise and best-in-class picture quality. QET displays are able to upscale low-resolution content to UHD-level picture quality. For commercial displays, this technology advancement means highly visible signage with unmatched accuracy to help capture the attention of potential customers. It also means savings both in cost and time for businesses who can produce content more inexpensively at a lower resolution and still display it in stunning UHD quality. The signage also provides rich and flawless colors, effortless minimalistic style from every angle and a boundless design for delivering an immersive viewing experience. Content can be controlled remotely with Samsung's simple management system, MagicINFO Lite. With industry-leading features and specifications, QET displays are economical and efficient, providing ultimate value to business.



\* Results based on IHS Technology report "Public Displays Market Tracker", 2009 – 2018. Information is not an endorsement of Samsung. Any reliance on these results is at the third party's own risk.  
 \*\* Results based on Omdia, Jan-2020. Ranking in terms of shipments. Results are not an endorsement of Samsung. Any reliance on these results is at the third-party's own risk.

## Key features




### Incredible UHD picture quality

Samsung's new QET series is able to capture customer attention by providing an incredibly clear picture, showcasing lifelike images and intricate details better than ever before thanks to ultra high-definition 4K resolution.




### Crystal Display

Samsung's QET series features a Crystal Display which optimizes color tones without distortion, ensuring each backlight unit is fine-tuned to match each color filter and create a clear native white.

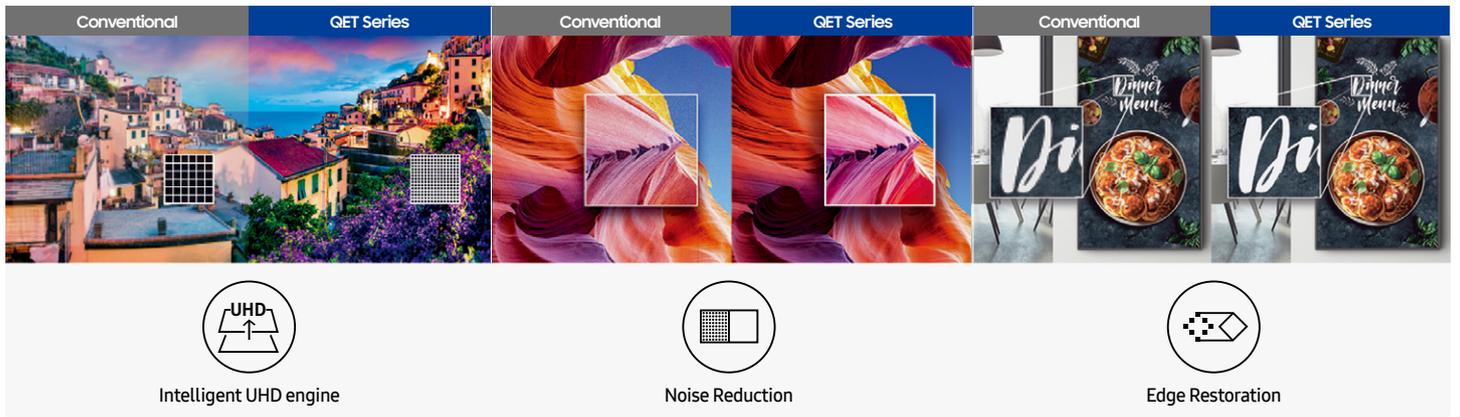


### Crystal Processor 4K

Samsung's global leadership in display technology and picture quality spans more than a decade. Thanks to superior semi-conductor technology, Samsung has developed the powerful video processor available. Additionally, intelligent UHD upscaling technology is a cutting-edge solution based on Samsung's Crystal Processor 4K that allows content developed at a lower resolution to be elevated to UHD-level quality. It also performs edge restoration and noise reduction to optimize on-screen text and imagery with crisp edges and fine detail.

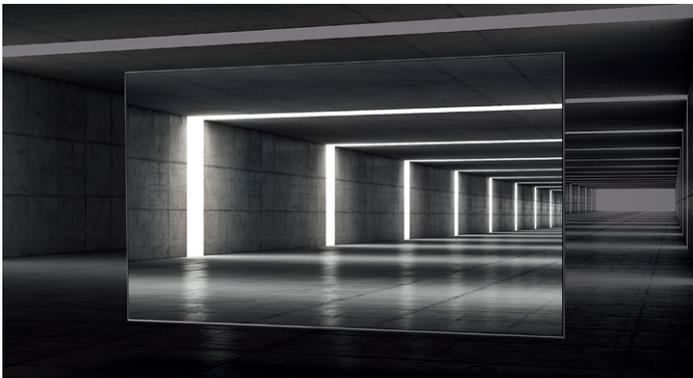

### Boundless design for an immersive experience

The boundless design of the display is optimized to allow the viewer to be completely immersed by content. With a three-sided bezel-less design that eliminates unnecessary and unused space, the display seamlessly integrates into any business environment.

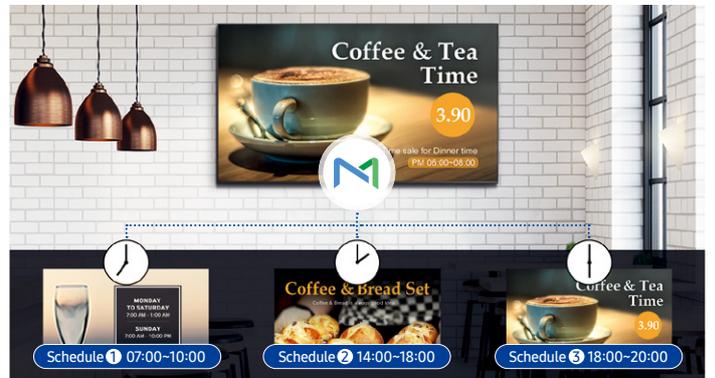

### Integrated contents management solution

With a range of on-demand and prescheduled images and videos included in the integrated MagicINFO Lite Player, content management is easier than ever before. Users can also load new content directly from their personal computer through the display's built-in port or simply transfer files with a USB drive.

# Specifications

Model			QE43T	QE50T	QE55T	QE65T	QE70T	QE75T	QE82T		
Panel	Diagonal Size	Class	43"	50"	55"	65"	70"	75"	82"		
		Measured	42.5"	49.5"	54.6"	64.5"	69.5"	74.5"	81.5"		
	Type	Direct LED BLU	Direct LED BLU	Direct LED BLU	Direct LED BLU	Direct LED BLU	Direct LED BLU	Direct LED BLU	Direct LED BLU		
	Resolution	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)		
	Pixel Pitch(mm)	0.2451 x 0.2451	0.285375 x 0.285375	0.315 x 0.315	0.372 x 0.372	0.392 x 0.392	0.4296 x 0.4296	0.47025 x 0.47025	0.47025 x 0.47025		
	Active Display Area(mm)	941.184 (H) x 529.416 (V)	1095.84 (H) x 616.41 (V)	1209.6(H) x 680.4(V)	1428.48 (H) x 803.52 (V)	1549.44 (H) x 846.72 (V)	1650.24 (H) x 928.26 (V)	1805.76(H) x 1015.74(V)	1805.76(H) x 1015.74(V)		
	Brightness(Typ.)	300	300	300	300	300	300	300	300		
	Contrast Ratio(Typ.)	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1		
	Viewing Angle(H/V)	178/178	178/178	178/178	178/178	178/178	178/178	178/178	178/178		
	Response Time(G-to-G)	8ms(Typ.)	8ms(Typ.)	8ms(Typ.)	8ms(Typ.)	8ms(Typ.)	8ms(Typ.)	8ms(Typ.)	6ms(Typ.)		
Display Colors	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M			
Color Gamut	72%	72%	72%	72%	72%	72%	72%	72%			
Operation Hour	16/7	16/7	16/7	16/7	16/7	16/7	16/7	16/7			
Haze	2%	2%	2%	2%	2%	2%	2%	2%			
Display	Dynamic C/R	MEGA	MEGA	MEGA	MEGA	MEGA	MEGA	MEGA	MEGA		
	H-Scanning Frequency	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz		
	V-Scanning Frequency	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz		
	Maximum Pixel Frequency	594MHz	594MHz	594MHz	594MHz	594MHz	594MHz	594MHz	594MHz		
Sound	Speaker Type	Built in Speaker(10W+10W)	Built in Speaker(10W+10W)	Built in Speaker(10W+10W)	Built in Speaker(10W+10W)	Built in Speaker(10W+10W)	Built in Speaker(10W+10W)	Built in Speaker(10W+10W)	Built in Speaker(10W+10W)		
		-	-	-	-	-	-	-	-		
Connectivity	INPUT	RGB	-	-	-	-	-	-	-		
		VIDEO	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)		
		HDCP	HDCP 2.2	HDCP 2.2	HDCP 2.2	HDCP 2.2	HDCP 2.2	HDCP 2.2	HDCP 2.2		
		AUDIO	Stereo Mini Jack, HDMI/Audio(Common)	Stereo Mini Jack, HDMI/Audio(Common)	Stereo Mini Jack, HDMI/Audio(Common)	Stereo Mini Jack, HDMI/Audio(Common)	Stereo Mini Jack, HDMI/Audio(Common)	Stereo Mini Jack, HDMI/Audio(Common)	Stereo Mini Jack, HDMI/Audio(Common)		
	OUTPUT	USB	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1		
		RGB	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
		VIDEO	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
		AUDIO	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack		
	EXTERNAL CONTROL	Power Out	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
		USB	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
Power	Type	RS232C(in) thru stereo jack, RJ45 Internal	RS232C(in) thru stereo jack, RJ45 Internal	RS232C(in) thru stereo jack, RJ45 Internal	RS232C(in) thru stereo jack, RJ45 Internal	RS232C(in) thru stereo jack, RJ45 Internal	RS232C(in) thru stereo jack, RJ45 Internal	RS232C(in) thru stereo jack, RJ45 Internal	RS232C(in) thru stereo jack, RJ45 Internal		
	Power Supply	AC100 - 240V (+/-10%), 50/60Hz	AC100 - 240V (+/-10%), 50/60Hz	AC100 - 240V (+/-10%), 50/60Hz	AC100 - 240V (+/-10%), 50/60Hz	AC100 - 240V (+/-10%), 50/60Hz	AC100 - 240V (+/-10%), 50/60Hz	AC100 - 240V (+/-10%), 50/60Hz	AC100 - 240V (+/-10%), 50/60Hz		
	Power Consumption	Max[W/h]	121	149	154	204	242	253	275		
		Typical[W/h]	80	95	105	145	180	171	211		
		Rating[W/h]	110	135	140	185	220	230	250		
		BTU(Max)	412.6	508.1	525.1	695.6	825.2	862.7	937.8		
		Sleep mode	0.5	0.5	0.5	0.5	0.5	0.5	0.5		
		Off mode	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
	Mechanical Spec	Dimension(mm)	Set	963.9 x 558.9 x 59.6	1116.8 x 644.2 x 59.9	1230.5 x 707.2 x 59.9	1449.4 x 830.3 x 59.9	1572.4 x 874.5 x 59.9	1673.2 x 958.2 x 59.9	1829.9 x 1045 x 59.9	
			Package	1081 x 670 x 143	1264 x 780 x 150	1386 x 843 x 158	1606 x 963 x 184	1746 x 1035 x 190	1840 x 1118 x 198	2033 x 1209 x 290	
Weight (kg)		Set	8.4	11.7	14.1	21.2	25.1	30.9	37.5		
		Package	12.1	16.1	19.3	29.4	34.3	41.5	52.1		
VESA Mount		200 X 200	200 X 200	200 X 200	400 X 300	400 X 300	400 X 400	400 X 400	600 X 400		
Protection Glass		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
Stand Type		Foot Stand (Optional)	Foot Stand (Optional)	Foot Stand (Optional)	No	No	No	No	No		
Bezel Width (Top/Side/Bot) (mm)	3 Bezel-less	3 Bezel-less	3 Bezel-less	3 Bezel-less	3 Bezel-less	3 Bezel-less	3 Bezel-less	3 Bezel-less			
Operation	Operating Temperature	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C			
	Humidity	10-80%	10-80%	10-80%	10-80%	10-80%	10-80%	10-80%			
Feature	Key	Special	UHD Signage with Built-in MagicInfo Lite	UHD Signage with Built-in MagicInfo Lite	UHD Signage with Built-in MagicInfo Lite	UHD Signage with Built-in MagicInfo Lite	UHD Signage with Built-in MagicInfo Lite	UHD Signage with Built-in MagicInfo Lite	UHD Signage with Built-in MagicInfo Lite		
		H/W	Temperature Sensor, Clock Battery (168hrs Clock Keeping), Built in Speaker (10W 2ch), IP5x Rating								
	Internal Player (Embedded H/W)	S/W	Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)								
		Processor	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	
		On-Chip Cache Memory	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB
		Clock Speed	1.7GHz	1.7GHz	1.7GHz	1.7GHz	1.7GHz	1.7GHz	1.7GHz	1.7GHz	
		Main Memory Interface	2.0GB	2.0GB	2.0GB	2.0GB	2.0GB	2.0GB	2.0GB	2.0GB	
		Graphics	LPDDR4 1.5GHz 64bit	LPDDR4 1.5GHz 64bit	LPDDR4 1.5GHz 64bit	LPDDR4 1.5GHz 64bit	LPDDR4 1.5GHz 64bit	LPDDR4 1.5GHz 64bit	LPDDR4 1.5GHz 64bit	LPDDR4 1.5GHz 64bit	
		Storage (FDM)	8GB (3.88GB Occupied by OS, 4.12GB Available)								
		Multimedia	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG								
IO Ports	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0			
Operating System	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)			
Certification	Safety	60950-1	60950-1	60950-1	60950-1	60950-1	60950-1	60950-1	60950-1		
	EMC	Class B	Class B	Class B	Class B	Class B	Class B	Class B	Class B		
	Environment	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
	Security	-	-	-	-	-	-	-	-		
Accessories	Included	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries									
	Optional	Stand	STN-L4355F	STN-L4355F	STN-L4355F	N/A	N/A	N/A	N/A		
		Mount	WMN40705E	WMN40705E	WMN40705E	WMN42775E	WMN42775E	WMN42775E	WMN82005E		
		Specialty	CML400XK	CML400XK	CML400XK	CML450K	CML450K	CML450K	N/A		
Media Player	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A			

## About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, cameras, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at [news.samsung.com](http://news.samsung.com).

## SMART Signage

For more information about Samsung SMART Signage QET Series Displays, visit [www.samsung.com/business](http://www.samsung.com/business) or [www.samsung.com/displaysolutions](http://www.samsung.com/displaysolutions)

Copyright © 2020 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.  
416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea